


Actuator

704.206.2

Distribution by
Mouser

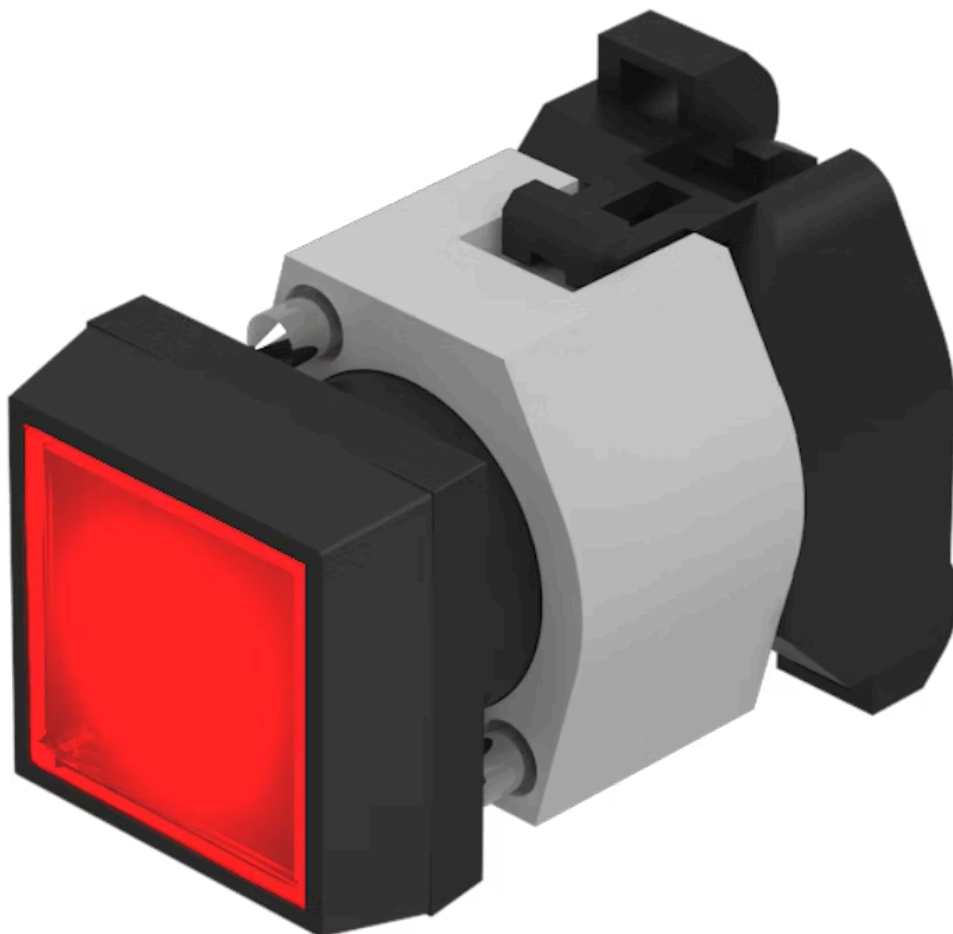

<https://mouser.eao.com/p/704.206.2>

Your product:



704.206.2 Actuator

FRONT

Front dimension:	30 mm x 30 mm
Front form:	Square
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Design:	Raised
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Red
Lens material:	Plastic
Lens shape:	Flush
Lens optics:	transparent
Marking plate colour:	White
Marking plate optics:	translucent
Marking plate illumination:	illuminative

ELECTRICAL CHARACTERISTICS

Switching rating:	
Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

MECHANICAL CHARACTERISTIC

Terminal:	Screw terminal
Weight:	0.05 kg

AMBIENT CONDITION


IP Protection:	IP65 front side
Operating temperature:	– 40 °C ... + 55 °C
Storage temperature:	– 40 °C ... + 85 °C

CERTIFICATE


REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER


Short Description:	Actuator, 30 mm x 30 mm, Flush, Red, Plastic, transparent, Square, Black, Plastic, Screw terminal
Housing colour:	Black
Housing material:	Plastic
Hints:	Filament lamp or LED
Wiring diagrams:	

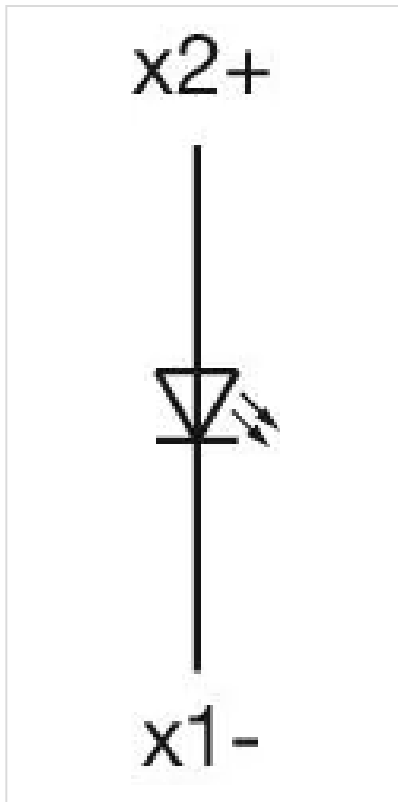


Mounting cut-outs:

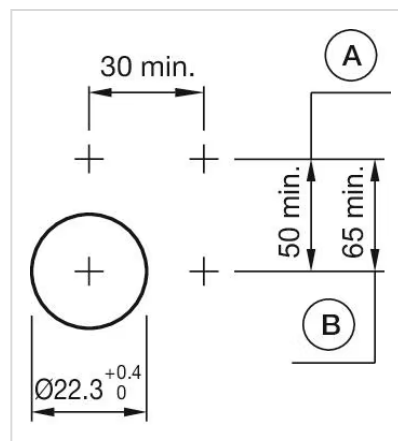

A = Screw terminal
B = Push-in terminal (PIT)

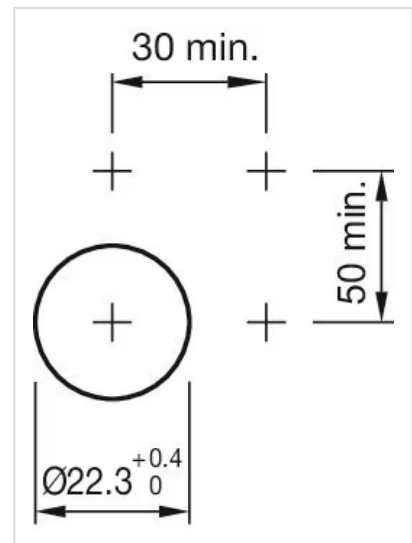

Dimension drawings:

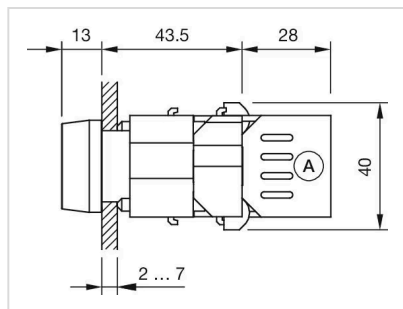

A = Screw terminal

