

# Actuator

704.207.5

Distribution by  
Mouser<https://mouser.eao.com/component/704.207.5/en...>

Your product:

---



704.207.5  
Actuator

#### PRODUCT RANGE

**Product Status:** Phase-out

#### FRONT

**Front dimension:** 30 mm x 30 mm  
**Front form:** Square  
**Front bezel colour:** Black  
**Front bezel material:** Plastic

#### MOUNTING

**Design:** Raised  
**Mounting type:** Panel mounting

#### OPERATING-/INDICATION PART

**Lens colour:** Green  
**Lens material:** Plastic  
**Lens shape:** Flush  
**Lens optics:** transparent  
**Marking plate colour:** Colourless  
**Marking plate optics:** transparent  
**Marking plate illumination:** illuminative

#### ELECTRICAL CHARACTERISTICS

**Standards:** The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1

### MECHANICAL CHARACTERISTICS

**Terminal:** Screw terminal

**Weight:** 0.04 kg

### AMBIENT CONDITION

**IP Protection:** IP65 front side

**Operating temperature:** – 40 °C ... + 55 °C

**Storage temperature:** – 40 °C ... + 85 °C

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER


**Short Description:** Actuator, 30 mm x 30 mm, Flush, Green, Plastic, transparent, Square, Black, Plastic, Screw terminal

**Housing colour:** Black

**Housing material:** Plastic


**Wiring diagrams:**

X2+

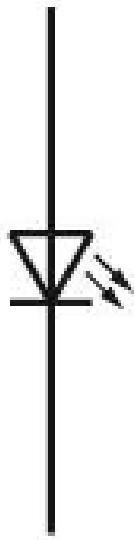


X1-



**Mounting cut-outs:**

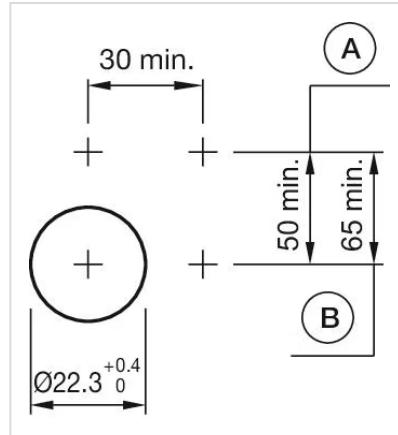

A = Screw terminal  
B = Push-in terminal (PIT)

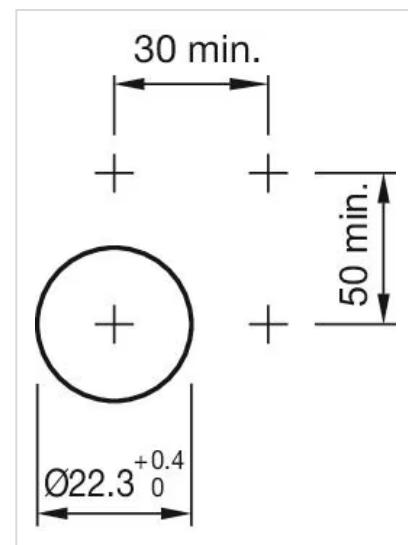

**Dimension drawings:**

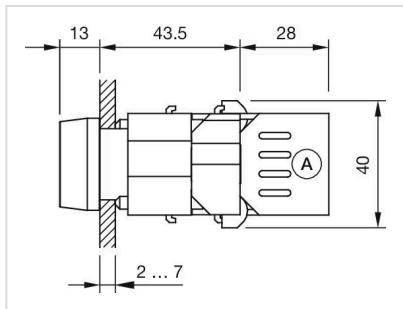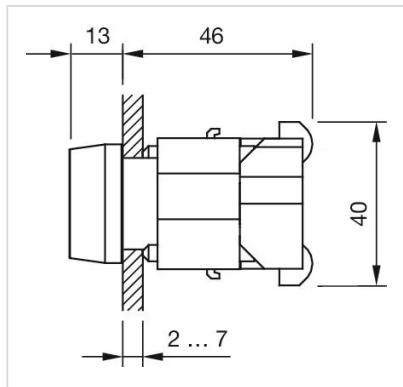

A = Screw terminal