


# Lamp element

71-670.006

Distribution by  
Mouser

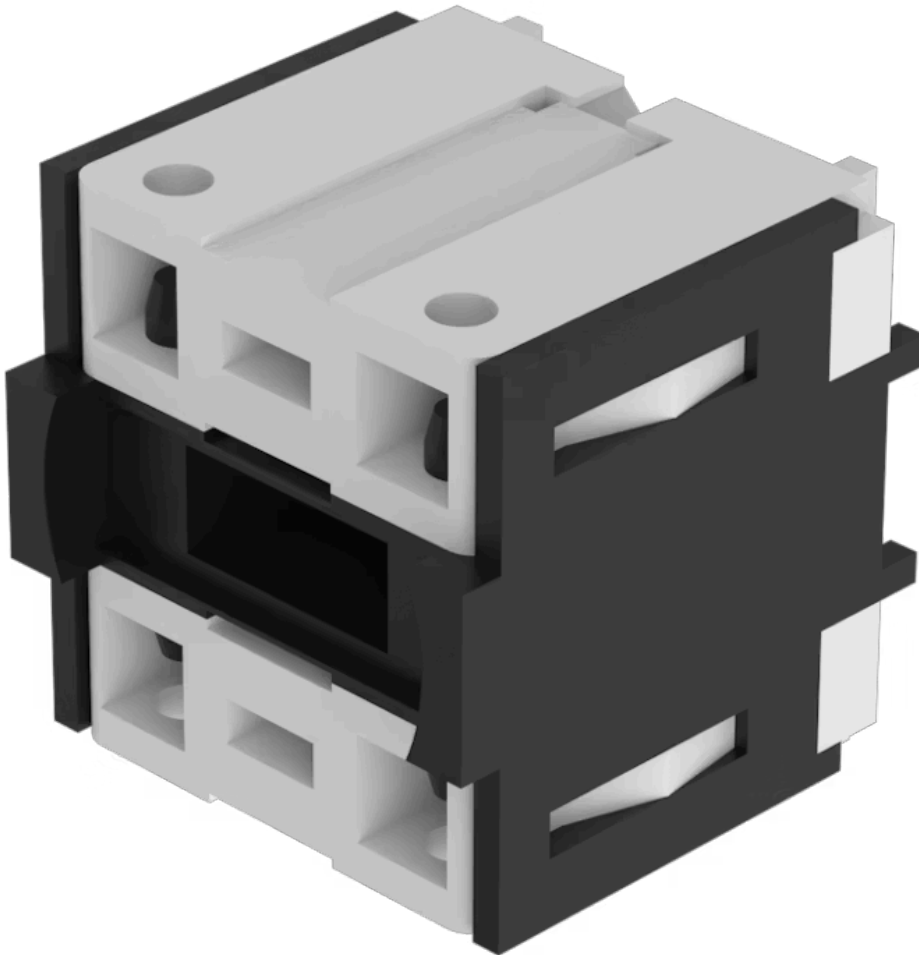

<https://mouser.eao.com/component/71-670.006/e...>

Your product:

---



## 71-670.006 Lamp element

*Loading ...*

### MECHANICAL CHARACTERISTICS

**Terminal:** PCB terminal

**Weight:** 0.005 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### OTHER


**Short Description:** Lamp element, PCB terminal, Plastic

**Material:** Plastic


**Housing material:** Plastic

**Hints:** Including locking pin

**Wiring diagrams:**

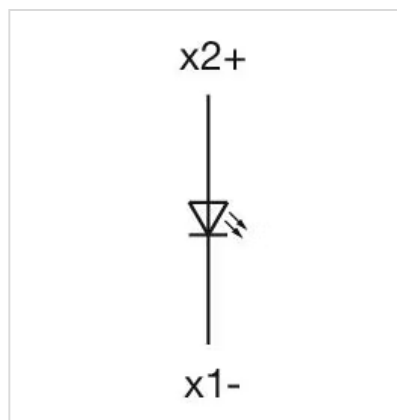

**Component layouts:**

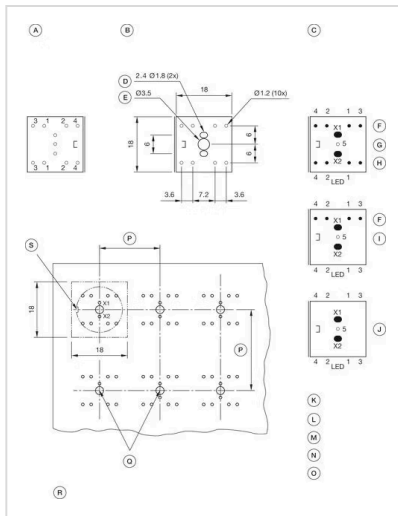

- A = Terminals (rear side)
- B = Drilling plan (component side)
- C = non-metallic
- D = Cu-Pad
- E = Occupancy plan (component side)
- F = 1. Switch
- G = Switching element 2 Normaly close + 2 Normaly open, Part No. 71-672.026
- H = 2. Switches
- I = Switching element 1 Normaly close + 1 Normaly open, Part No. 71-671.026
- J = Illumination element, Part No. 71-670.026
- K = X1 Lamp cathode (-)
- L = X2 Lamp anode (+)
- M = 1-2 Contact normally closed
- N = 3-4 Contact normally open
- O = 5 Hole for interlocking pin
- P = Front dimension min.
- Q = Position interlocking pin
- R = Note:  
Pitch of the print circuit board hole Ø3.5 must agree with the mounting holes on the front plate
- S = Slot in actuator