


Your Expert Partner for Human Machine Interfaces

Lamp element Distribution by Mouser 11-670.006



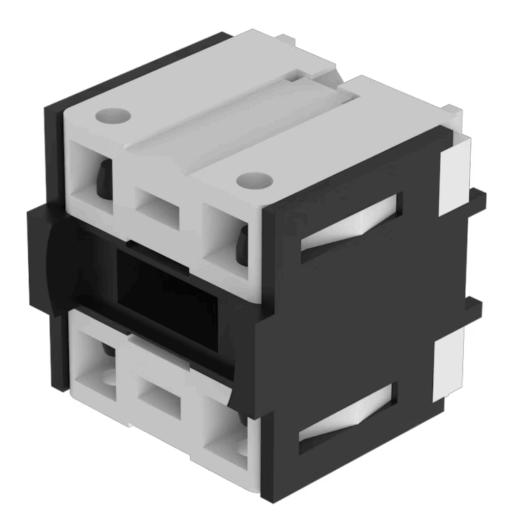

https://mouser.eao.com/p/71-670.006

Your product:




71-670.006 Lamp element

x1-

MECHANICAL CHARATERISTIC	
Terminal:	PCB terminal
Weight:	0.005 kg
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
Short Description:	Lamp element, PCB terminal, Plastic
Material:	Plastic
Housing material:	Plastic
Hints:	Including locking pin
Wiring diagrams:	
	x2+

Component layouts:

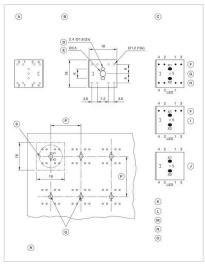

- A = Terminals (rear side)
- B = Drilling plan (component side)
- C = non-metallic
- D = Cu-Pad
- E = Occupancy plan (component side)
- F = 1. Switch
- G = Switching element 2 Normaly close +
- 2 Normaly open, Part No. 71-672.026
- H = 2. Switches
- I = Switching element 1 Normaly close +
- 1 Normaly open, Part No. 71-671.026 J = Illumination element, Part No. 71-
 - 670.026
 - K = X1 Lamp cathode (-)
 - L = X2 Lamp anode (+)
 - M = 1-2 Contact normally closed
 - N = 3-4 Contact normally open
 - O = 5 Hole for interlocking pin
 - P = Front dimension min.
 - Q = Position interlocking pin
 - R = Note:
- Pitch of the print circuit board hole Ø3.5

must agree with the mounting holes on the front plate S = Slot in actuator