


Switching element

71-672.026

Distribution by
Mouser

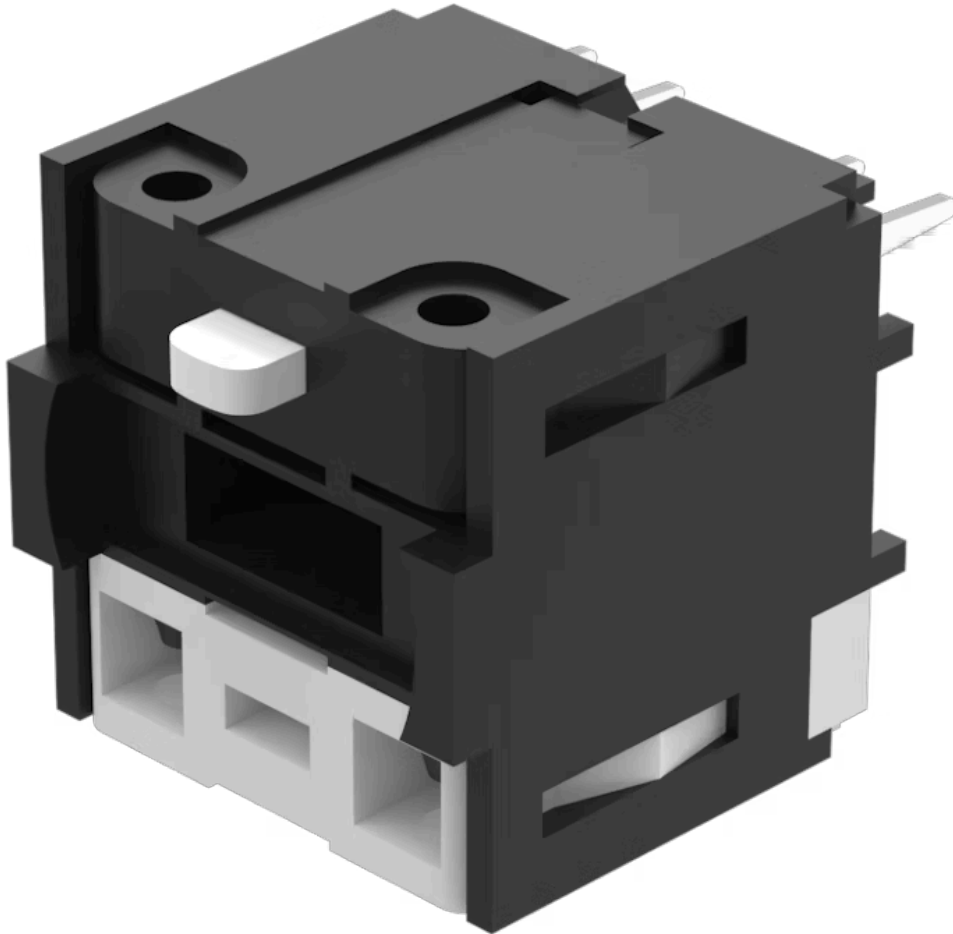

<https://mouser.eao.com/p/71-672.026>

Your product:



71-672.026

Switching element

ELECTRICAL CHARACTERISTICS

Contacts: 2 NC / 2 NO

Switching rating: 250 V @ 3 A

MECHANICAL CHARACTERISTIC

Terminal: PCB terminal

Contact material: Gold

Switching system: Snap-action switching element

Switching positions: 3 positions

Weight: 0.005 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 2 NC / 2 NO, PCB terminal

Housing material: Plastic, according to UL 94 V0

Product attributes: Including locking pin

Hints: Including locking pin

Wiring diagrams:

A = Terminals (rear side)
B = Drilling plan (component side)
C = non-metallic
D = Cu-Pad
E = Occupancy plan (component side)
F = 1. Switch
G = Switching element 2 Normally close +
2 Normally open, Part No. 71-672.026
H = 2. Switches
I = Switching element 1 Normally close +
1 Normally open, Part No. 71-671.026
J = Illumination element, Part No. 71-
670.026
K = X1 Lamp cathode (-)
L = X2 Lamp anode (+)
M = 1-2 Contact normally closed
N = 3-4 Contact normally open
O = 5 Hole for interlocking pin
P = Front dimension min.
Q = Position interlocking pin
R = Note:
Pitch of the print circuit board hole $\varnothing 3.5$
the front plate