

Your Expert Partner for Human Machine Interfaces

Indicator element

Distribution by Mouser



84-8001.4640





https://mouser.eao.com/p/84-8001.4640

Your product:




84-8001.4640 Indicator element

OPERATING-/INDICATION PART	
Illumination colour:	Yellow
ELECTRICAL CHARACTERISTICS	
Operating voltage:	24 V DC ±10 %
MECHANICAL CHARACTERISTICS	
Terminal:	Flat ribbon cable
Weight:	0.01 kg
AMBIENT CONDITION	
IP Protection:	IP40
CERTIFICATE	
REACH:	REACH compliant
RoHS:	RoHS compliant
OTHER	
Short Description:	Indicator element, Yellow, Single-LED, 24 V DC ±10 %, Flat ribbon cable
Kind of illlumination:	Single-LED
Hints:	LED and built-in resistor included Standard version: Cable length 300 mm Other options on request: Customisation of cable and connectors, rear side fully sealed (IP 67) Protection degree (rear side): IP 40, upgrade to IP 67 with plug Part No. 84-900 possible. With applications where strong vibrations occure, the plugs may become

loose

Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED

Wiring diagrams:

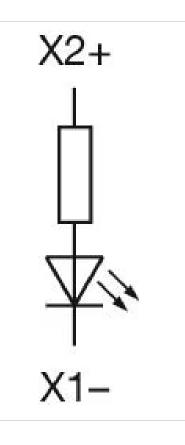

Component layouts:

