

Switching element

92-851.342

Distribution by
Mouser



<https://mouser.eao.com/p/92-851.342>

Your product:



92-851.342

Switching element

ELECTRICAL CHARACTERISTICS

Switching voltage and switching current:

Switching voltage	min. 50 m VAC/DC max. 42 VAC/DC
Switching current	min. 10 μ A AC/DC max. 100 mA AC/DC
Power rating	max. 2 W

Contacts:

1 NO

Switching rating:

42 V @ 0,1 A

Electrical lifetime:

$\geq 500\,000$ cycles of operation at 42VDC, 50mA, according to IEC 60512-5-9c,
When attention is paid to the direction of current flow from terminal 3/4 to 1/2 the
electrical life can be prolonged.

Electric strength:

500 VAC, 50 Hz, 1 minute according to DIN IEC 60512-2-4a

MECHANICAL CHARACTERISTICS

Terminal:

PCB terminal

Contact material:

Gold

Switching action:

Momentary

Switching system:

Short-travel element

Switching system:

Short-travel snap-action switching system with two independent contact points
and tactile operation
Guarantees reliable switching even of very light loads.
1 normally open contact

Mechanical lifetime:

≥ 1 Mil. cycles of operation (switching element under overlay), ≥ 5 Mil. cycles of
operation (switching element without overlay)

Operating force:

2.7 N \pm 1 N (measured on switching element)

Operating Travel:

ca. 0.5 mm

Weight:

0.001 kg

AMBIENT CONDITION


IP Protection:	IP40 switching element (fluxproof to DIN 41640 Part 84), IP65 (front side with overlay foil)
Operating temperature:	– 25 °C ... + 70 °C
Storage temperature:	– 40 °C ... + 85 °C

CERTIFICATE


Conformities:	CE, UKCA, 2011 / 65 / EC (RoHS)
REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Switching element, Short-travel element, 42 V @ 0,1 A, Gold, 1 NO, PCB terminal
Material:	Plastic
Hints:	The customer has to decide what series resistor shall be used to the LED LED and mounting flange to be ordered separately
Wiring diagrams:	

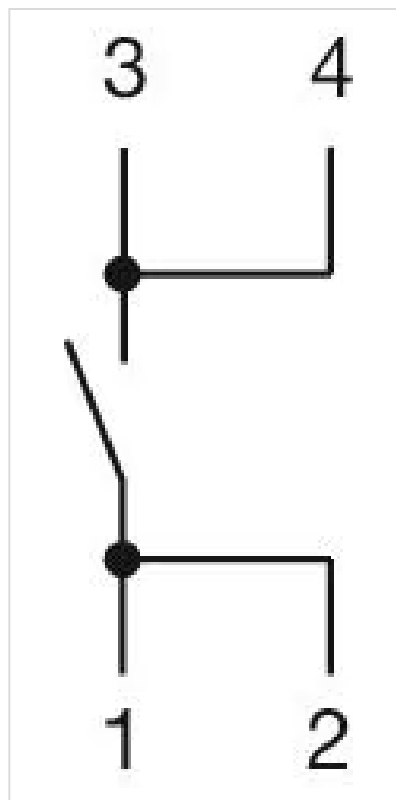

Component layouts:

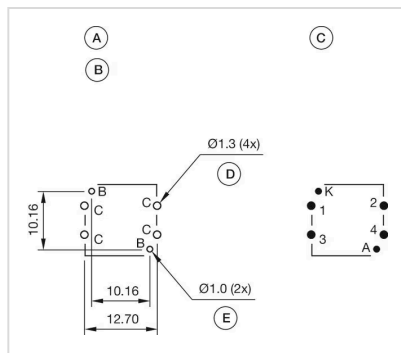

A = Switching element with illumination
 B = Single LED
 C = Drilling plan (component side)
 D = Hole for switching element, pad max.
 $\varnothing 2.5$ mm
 E = Hole for LED

Dimension drawings:

