

# Actuator

45-  
2134.4F50.000

Distribution by  
Mouser



<https://mouser.eao.com/component/45-2134.4F50...>

Your product:

---



## 45-2134.4F50.000 Actuator

*Loading ...*

### FRONT

<b>Front dimension:</b>	Ø 38 mm
<b>Front form:</b>	Round
<b>Front bezel colour:</b>	Sand grey
<b>Front bezel material:</b>	Metal

### MOUNTING

<b>Design:</b>	Flush
<b>Mounting cut-out:</b>	Ø 30.5 mm
<b>Mounting type:</b>	Panel mounting

### OPERATING-/INDICATION PART

<b>Lens colour:</b>	Green
<b>Lens material:</b>	Plastic
<b>Lens illumination:</b>	Non illuminated
<b>Lens shape:</b>	Flush
<b>Lens optics:</b>	opaque

### MECHANICAL CHARACTERISTICS

<b>Switching action:</b>	Maintained
<b>Switching system:</b>	Slow-make switching element
<b>Mechanical lifetime:</b>	10 Mil. cycles of operation
<b>Operating frequency:</b>	Max. 1 800/h

**Weight:** 0.071 kg

### **AMBIENT CONDITION**

**IP front protection:** IP66, IP67, IP69K

**Operating temperature:** – 25 °C ... + 70 °C

**Storage temperature:** – 40 °C ... + 80 °C

**Shock resistance:** According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

**Vibration resistance:** According to IEC 60068-2-6: 20 ... 500 Hz: 5 g

**Climate resistance:** During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

### **CERTIFICATE**

**REACH:** REACH compliant

**RoHS:** RoHS compliant

### **OTHER**


**Short Description:** Actuator, Ø 30.5 mm, Ø 38 mm, Flush, Non illuminated, Green, Plastic, opaque, Round, Sand grey, Metal, Maintained, IP66, IP67, IP69K

**Housing colour:** Silver

**Housing material:** Metal

**Hints:** Push to unlatch

**Wiring diagrams:**

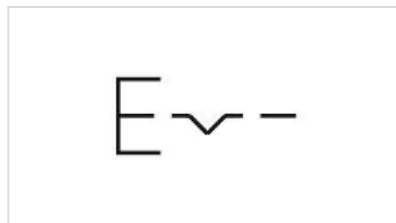

**Dimension drawings:**

