

Actuator

45-

2134.4F50.000

Distribution by
Mouser<https://mouser.eao.com/component/45-2134.4F50...>

Your product:



45-2134.4F50.000 Actuator

FRONT

Front dimension:	Ø 38 mm
Front form:	Round
Front bezel colour:	Sand grey
Front bezel material:	Metal

MOUNTING

Design:	Flush
Mounting cut-out:	Ø 30.5 mm
Mounting type:	Panel mounting

OPERATING-/INDICATION PART

Lens colour:	Green
Lens material:	Plastic
Lens illumination:	Non illuminated
Lens shape:	Flush
Lens optics:	opaque

MECHANICAL CHARACTERISTICS

Switching action:	Maintained
Switching system:	Slow-make switching element
Mechanical lifetime:	10 Mil. cycles of operation
Operating frequency:	Max. 1 800/h

Weight: 0.071 kg

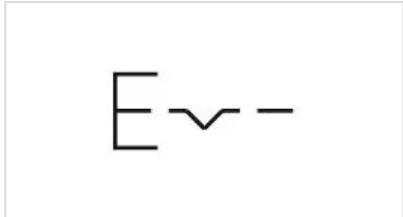
AMBIENT CONDITION

IP front protection:	IP66, IP67, IP69K
Operating temperature:	– 25 °C ... + 70 °C
Storage temperature:	– 40 °C ... + 80 °C
Shock resistance:	According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms
Vibration resistance:	According to IEC 60068-2-6: 20 ... 500 Hz: 5 g
Climate resistance:	During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH:	REACH compliant
RoHS:	RoHS compliant

OTHER

Short Description:	Actuator, Ø 30.5 mm, Ø 38 mm, Flush, Non illuminated, Green, Plastic, opaque, Round, Sand grey, Metal, Maintained, IP66, IP67, IP69K
Housing colour:	Silver
Housing material:	Metal
Hints:	Push to unlatch
Wiring diagrams:	

Dimension drawings:

