

Actuator

45-
280S.4D20.003

Distribution by
Mouser



<https://mouser.eao.com/p/45-280S.4D20.003>

Your product:



45-280S.4D20.003 Actuator

FRONT

Front dimension: Ø 38 mm

Front form: Round

Front bezel colour: Sand grey

Front bezel material: Metal

MOUNTING

Design: Flush

Mounting cut-out: Ø 30.5 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lever colour: Red

Lever material: plastic

Lever shape: long

ELECTRICAL CHARACTERISTICS

Switching rating:

MECHANICAL CHARACTERISTIC

Switching action: Momentary - Rest - Momentary

Switching positions: 3 positions

Switching angle: 45° left / 45° right

Mechanical lifetime: 1 Mil. cycles of operation

Operating frequency: 1 800/h

Weight: 0.084 kg

AMBIENT CONDITION

IP front protection: IP66, IP67, IP69K

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 10 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant


OTHER

Short Description: Actuator, Ø 30.5 mm, Ø 38 mm, optional illuminative, Red, long, Round, Sand grey, Metal, Momentary - Rest - Momentary, IP66, IP67, IP69K


Housing material: Metal

Hints: Front panel thickness 1 ... 6 mm

Switching positions:

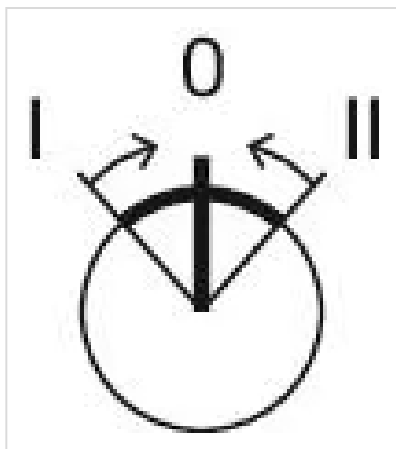

Wiring diagrams:

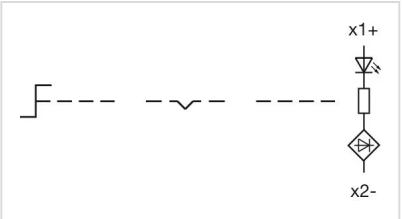

Dimension drawings:

