


e a o

Your Expert Partner for Human Machine Interfaces

Actuator

704.114.0

Distribution by
Mouser

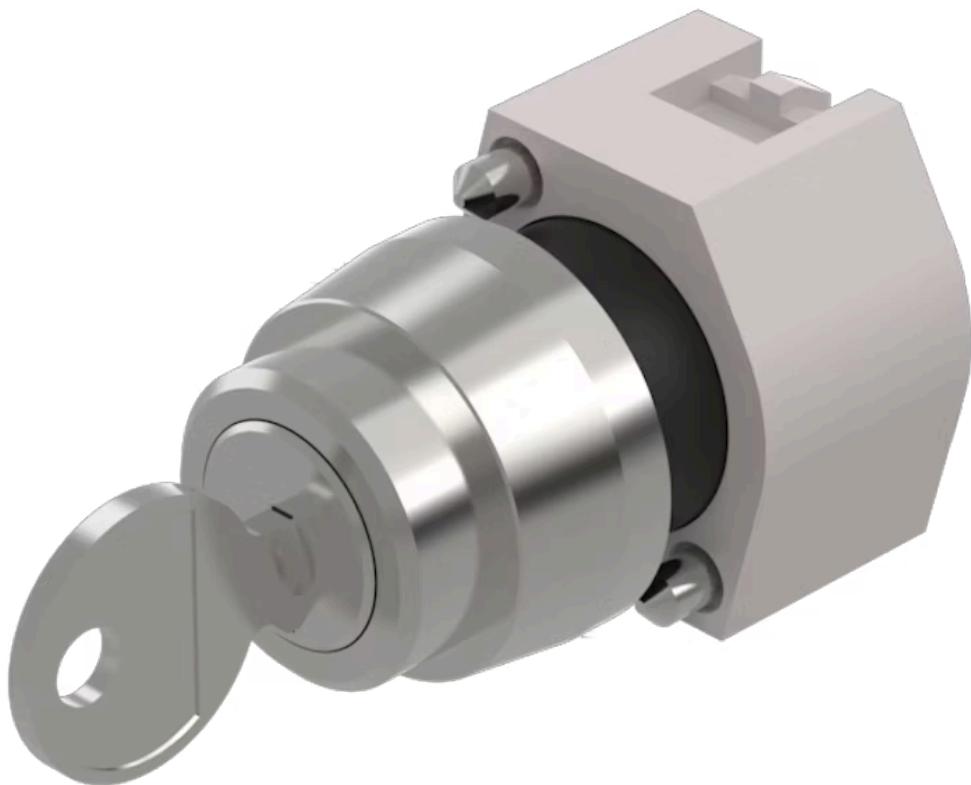

<https://mouser.eao.com/component/704.114.0/en...>

Your product:



704.114.0 Actuator

FRONT

Front dimension:	Ø 29 mm
Front form:	Round
Front bezel colour:	Nature
Front bezel material:	Aluminium

MOUNTING

Design:	Raised
Mounting type:	Panel mounting

ELECTRICAL CHARACTERISTICS

Standards:	The switches comply with the "Standards for low-voltage switching devices" DIN EN 60947-1
-------------------	-------------------------------------------------------------------------------------------

MECHANICAL CHARACTERISTICS

Switching action:	Maintained - Rest (a) - Maintained
Switching positions:	3 positions
Switching angle:	42° left / 42° right
Mechanical lifetime:	≤50 000 cycles of operation
Weight:	0.071 kg

AMBIENT CONDITION

IP Protection:	IP65 front side
Operating temperature:	- 40 °C ... + 55 °C

Storage temperature:

– 40 °C ... + 85 °C

CERTIFICATE

REACH:

REACH compliant

RoHS:

RoHS compliant

OTHER

Short Description:

Actuator, Ø 29 mm, Round, Nature, Aluminium, Maintained - Rest (a) - Maintained

Hints:

The standard lock Ronis 251


Further lock numbers on request

Max. 3 switching elements can be clipped on

max. number of switching elements:

3


Switching positions:

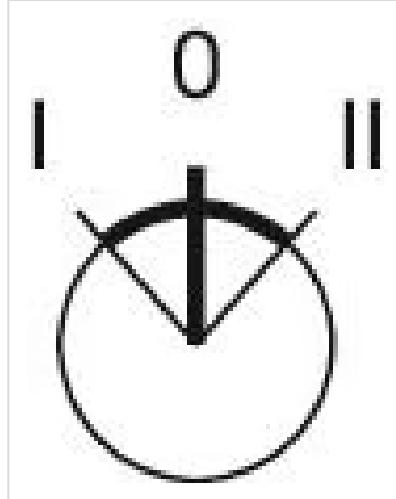

Wiring diagrams:




Mounting cut-outs:

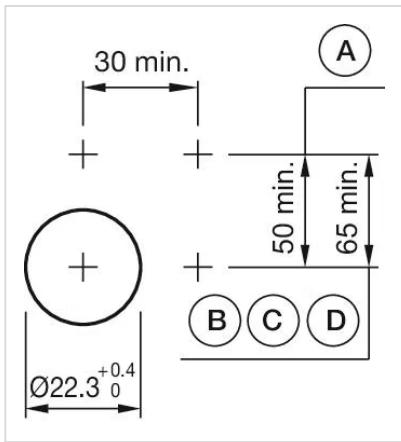

A = Screw terminal
 B = Push-in terminal (PIT)
 C = Plug-in terminal 6.3 mm x 0.8 mm
 D = Double plug-in terminal 6.3 mm x 0.8 mm

Dimension drawings:

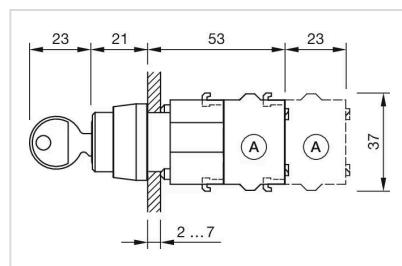

A = Screw terminal