

Push button, connector M12, Ø 22 mm, stainless steel 316L

Distribution by
Mouser



82-6657.2000



<https://mouser.eao.com/component/82-6657.2000...>

Your product:



82-6657.2000

Push button, connector M12, Ø 22 mm,
stainless steel 316L

FRONT

Front dimension: Ø 25 mm

Front form: Round

Front bezel material: Stainless steel 316L

Front bezel shape: Flush

MOUNTING

Mounting cut-out: Ø 22 mm

Mounting type: Panel mounting

OPERATING-/INDICATION PART

Lens colour: Silver

Lens material: Stainless steel 316L

Lens illumination: Non illuminated

Lens shape: Flush

Lens optics: opaque

ELECTRICAL CHARACTERISTICS

Switching voltage and switching current: according to UL 508 (Silver contacts)
 $\cos\phi$ 0,75 ... 0,8

| Voltage | Current |
|---------|---------|
| 120 VAC | 5 A |
| 240 VAC | 3 A |
| 24 VAC | 1 A |

according to IEC 60947-5-1 (Silver contacts)

Service categorie AC-15

| | |
|--|---------------------|
| Voltage | Current |
| 24 VAC | 1 A |
| 35 VAC | 1 A (M12 version) |
| 110 VAC | 1 A |
| 220 VAC | 0.5 A |
| Switch rating DC service categorie DC-13 (Silver contacts) | |
| Voltage | Current |
| 24 VDC | 0.7 A |
| 35 VDC | 0.5 A (M12 version) |
| 110 VDC | 0.2 A |
| 220 VDC | 0.1 A |

Rated Operational Voltage Ue: 250 VAC

Rated insulation voltage Ui: 250 V

Switching rating: 35 V AC/DC @ 0,6 A

Electrical lifetime: 50 000 cycles of operation

Electric strength: 1500 VAC, 50 Hz 1 minute between life terminals and ground

Pollution degree: 2, according to EN IEC 60947-1

Thermal current Ith: 5 A

MECHANICAL CHARACTERISTICS

Terminal: Connector M12 (5 pins)

Switching action: Maintained

Switching system: Snap-action switching element

Mechanical lifetime: 500 000 cycles of operation

Operating force: 4 N ... 7 N

Operating Travel: ca. 3 mm

Tightening torque: 0.5 ... 0.6 Nm

Weight: 0.043 kg

AMBIENT CONDITION

IP front protection: IP65, IP67

Operating temperature: - 30 °C ... + 70 °C

Storage temperature: - 40 °C ... + 80 °C

Shock resistance: Max. 500 m / s² as per IEC 60068-2-27

Vibration resistance: 10 ... 500 Hz, amplitude 1.5 mm p-p according to IEC 60068-2-6

Climate resistance: Damp heat, 21 days according to IEC 60512-11

CERTIFICATE

Conformities:

CE, 2011 / 65 / EC (RoHS), 2014 / 35 / EU (LVD)

REACH:

REACH compliant

RoHS:


RoHS compliant

OTHER


Short Description:

Push button, connector M12, Ø 22 mm, stainless steel 316L, Maintained, 35 V AC/DC @ 0,6 A, Connector M12 (5 pins), Round, Stainless steel 316L, Silver

Wiring diagrams:

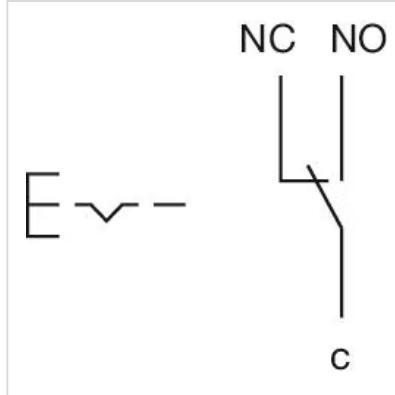

Component layouts:

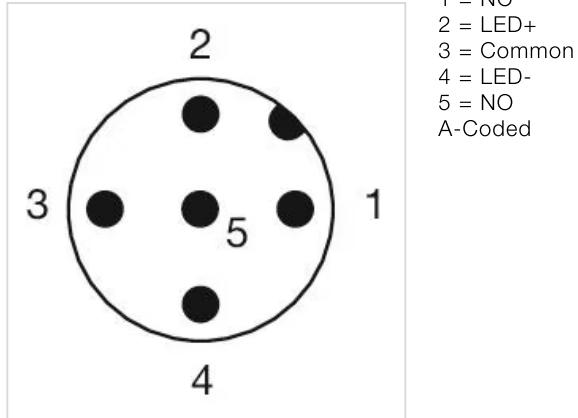

Mounting cut-outs:



Dimension drawings:

